


# vimrc airline style ... sans airline

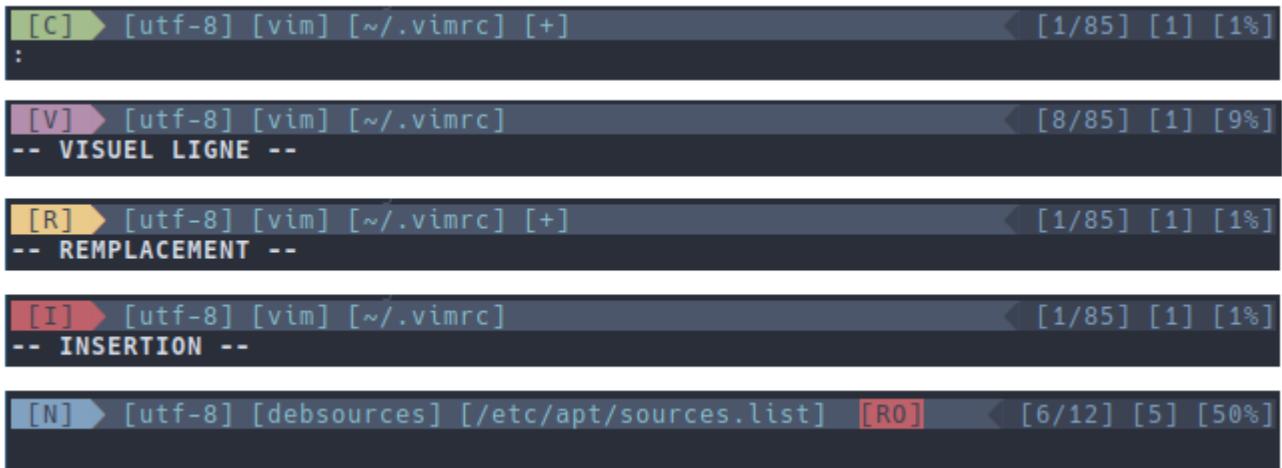

```
" vim-plug ---
call plug#begin(has('nvim') ? stdpath('data') . '/plugged' :
'~/vim/plugged')

Plug 'preservim/nerdtree'
Plug 'airblade/vim-gitgutter'
Plug 'mhinz/vim-startify'

call plug#end()

" plugins config ---
let g:gitgutter_highlight_lines = 1
let g:gitgutter_highlight_linenrs = 1

" common config ---
colorscheme nord          " theme de couleurs
set nocompatible          " activation de la conf vim
set autochdir              " cd dans le répertoire du fichier
set mouse=a                 " souris active
set autoread                " surveiller les changements du fichier ouvert
set showmode                  " afficher le mode sur la dernière ligne
syntax on                      " coloration syntaxique
set number                     " numérotation des lignes
set cursorline                " surligner la ligne active
"set cursorlineopt=number " seulement le numéro de ligne
set ruler                      " affiche la position du curseur
set hlsearch                    " surligne les recherches
set ignorecase                 " ignore la casse lors d'une recherche
set smartcase                   " sauf si la recherche comporte une majuscule

set preserveindent            " preserver l'indentation
set autoindent                  " indentation automatique
set shiftwidth=4                 " largeur de l'auto-indentation
```

```
set tabstop=4          " largeur d'une tabulation
set expandtab         " remplace les tabulations par des espaces
filetype on           " détection des fichiers
filetype plugin on   " activer les plugins spécifiques
filetype indent on   " activer l'indentation spécifique

set list               " afficher les fins de lignes
set listchars=nbsp:_,tab:.,trail:»,extends:►,precedes:◀ „,eol:»

set wildmenu          " autocomplete des commandes avec TAB
set wildoptions=pum   " popup menu

" Statusline
" %F – Display the full path of the current file.
" %M – Modified flag shows if file is unsaved.
" %Y – Type of file in the buffer.
" %{&fenc} - file encoding.
" %R – Displays the read-only flag.
" %b – Shows the ASCII/Unicode character under cursor.
" 0x%B – Shows the hexadecimal character under cursor.
" %l/%L – Display the line number/total line number.
" %c – Display the column number.
" %p% – Show the cursor percentage from the top of the file.

" statusline colors
hi NColor ctermfg=0 ctermbg=4
hi NSColor ctermfg=4 ctermbg=8
hi IColor ctermfg=0 ctermbg=1
hi ISColor ctermfg=1 ctermbg=8
hi RColor ctermfg=0 ctermbg=11
hi RSColor ctermfg=11 ctermbg=8
hi VColor ctermfg=0 ctermbg=5
hi VSColor ctermfg=5 ctermbg=8
hi CColor ctermfg=0 ctermbg=2
hi CSColor ctermfg=2 ctermbg=8

hi RightColor ctermfg=4 ctermbg=0
hi RightSepColor ctermfg=0 ctermbg=8

set laststatus=2      " toujours afficher la Statusline
set statusline=        " nettoyer la statusline au lancement
" status mode indicator airline style -- demande 'colorscheme nord'
set statusline+=%#NColor#%{ (mode()=='n')?'\\ \ [N]\\
':''}\ %#NSColor#%{ (mode()=='n')?'\\ \ :''}
set statusline+=%#IColor#%{ (mode()=='i')?'\\ \ [I]\\
':''}\ %#ISColor#%{ (mode()=='i')?'\\ \ :''}
set statusline+=%#RColor#%{ (mode()=='R')?'\\ \ [R]\\
':''}\ %#RSColor#%{ (mode()=='R')?'\\ \ :''}
set statusline+=%#VColor#%{ (mode()=='v')?'\\ \ [V]\\
':''}\ %#VSColor#%{ (mode()=='v')?'\\ \ :''}
set statusline+=%#CColor#%{ (mode()=='c')?'\\ \ [C]\\
':''}
```

```
' : '' } \ %#CSColor#%{ (mode()=='c') ? '\u2019 : '' }  
set statusline+=%#StatusLine#                                " back 2 default  
set statusline+=\ [%{&fenc}]\ %y\ [%1.25F]\ %m      " status left  
set statusline+=\ %#IColor#\%r\ %#StatusLine#          " red bg 4 R0  
set statusline+=%=%#RightSepColor#\%#RightColor# " status right  
set statusline+=\ [%l/%L]\ [%c]\ [%p%]
```

From:

<http://debian-facile.org/> - Documentation - Wiki

Permanent link:

<http://debian-facile.org/utilisateurs:arpinux:config:vimrc>



Last update: **14/05/2023 00:58**