


vimrc airline style ... sans airline

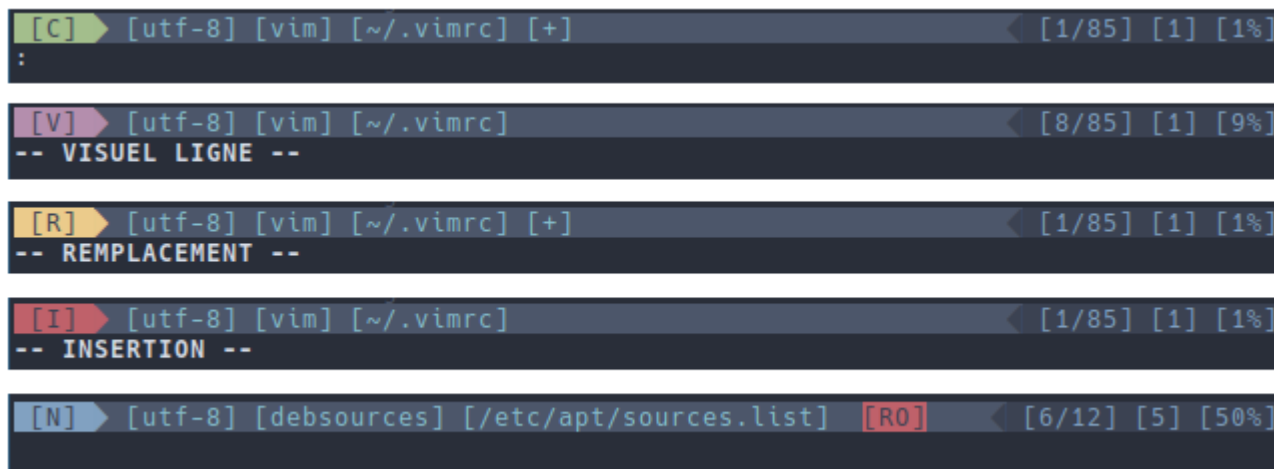

```
" vim-plug ---
call plug#begin(has('nvim') ? stdpath('data') . '/plugged' :
'~/vim/plugged')

Plug 'preservim/nerdtree'
Plug 'airblade/vim-gitgutter'
Plug 'mhinz/vim-startify'

call plug#end()

" plugins config ---
let g:gitgutter_highlight_lines = 1
let g:gitgutter_highlight_linenrs = 1

" common config ---
colorscheme nord           " theme de couleurs
set nocompatible          " activation de la conf vim
set autochdir             " cd dans le répertoire du fichier
set mouse=a               " souris active
set autoread              " surveiller les changements du fichier ouvert
set showmode              " afficher le mode sur la dernière ligne
syntax on                 " coloration syntaxique
set number                " numérotation des lignes
set cursorline            " surligner la ligne active
"set cursorlineopt=number " seulement le numéro de ligne
set ruler                 " affiche la position du curseur
set hlsearch              " surligne les recherches
set ignorecase            " ignore la casse lors d'une recherche
set smartcase             " sauf si la recherche comporte une majuscule

set preserveindent        " préserver l'indentation
set autoindent            " indentation automatique
set shiftwidth=4          " largeur de l'auto-indentation
```

```

set tabstop=4          " largeur d'une tabulation
set expandtab          " remplace les tabulation en espaces
filetype on           " détection des fichiers
filetype plugin on    " activer les plugins spécifiques
filetype indent on    " activer l'indentation spécifique

set list              " afficher les fins de lignes
set list listchars=nbsp:␣,tab:⋯,trail:⌘,extends:▶,precedes:◀ ",eol:⌘

set wildmenu          " autocompletion des commandes avec TAB
set wildoptions=pum    " popup menu

" Statusline
" %F – Display the full path of the current file.
" %M – Modified flag shows if file is unsaved.
" %Y – Type of file in the buffer.
" %{&fenc} - file encoding.
" %R – Displays the read-only flag.
" %b – Shows the ASCII/Unicode character under cursor.
" 0x%B – Shows the hexadecimal character under cursor.
" %l/%L – Display the line number/total line number.
" %c – Display the column number.
" %p%% – Show the cursor percentage from the top of the file.

" statusline colors
hi NColor ctermbg=4 ctermfg=0
hi NSColor ctermbg=8 ctermfg=4
hi IColor ctermbg=1 ctermfg=0
hi ISColor ctermbg=8 ctermfg=1
hi RColor ctermbg=11 ctermfg=0
hi RSColor ctermbg=8 ctermfg=11
hi VColor ctermbg=5 ctermfg=0
hi VSColor ctermbg=8 ctermfg=5
hi CColor ctermbg=2 ctermfg=0
hi CSColor ctermbg=8 ctermfg=2

hi RightColor ctermbg=0 ctermfg=4
hi RightSepColor ctermbg=8 ctermfg=0

set laststatus=2      " toujours afficher la Statusline
set statusline=       " nettoyer la statusline au lancement
" status mode indicator airline style -- demande 'colorscheme nord'
set statusline+=%#NColor#%{(mode()== 'n')?' \ [N]\
': ''}\%#NSColor#%{(mode()== 'n')?' \ [N]\
': ''}\%#ISColor#%{(mode()== 'i')?' \ [I]\
': ''}\%#ISColor#%{(mode()== 'i')?' \ [I]\
': ''}\%#RColor#%{(mode()== 'R')?' \ [R]\
': ''}\%#RSColor#%{(mode()== 'R')?' \ [R]\
': ''}\%#VColor#%{(mode()== 'v')?' \ [V]\
': ''}\%#VSColor#%{(mode()== 'v')?' \ [V]\
': ''}\%#CColor#%{(mode()== 'c')?' \ [C]\

```

```
' : ' } \ % # C S C o l o r # % { ( m o d e ( ) == ' c ' ) ? ' \ \ ' : ' ' }  
set statusline+=%#StatusLine# " back 2 default  
set statusline+=\ [%{&fenc}]\ %y\ [%1.25F]\ %m " status left  
set statusline+=\ %#IColor#%r\%#StatusLine# " red bg 4 R0  
set statusline+=%=%#RightSepColor#\%#RightColor# " status right  
set statusline+=\ [%l/%L]\ [%c]\ [%p%]
```

From:

<http://debian-facile.org/> - **Documentation - Wiki**

Permanent link:

<http://debian-facile.org/utilisateurs:arpinux:config:vimrc>



Last update: **14/05/2023 00:58**